

Probe-holders

"NPED"

Data Sheet

FEATURES

- Off-line probe holders (min flow 20l/h, max flow 80l/h)
- Simple installation
- Bracket for wall mounting
- All cups available transparent or black against sun light

NPED

Off-line probe holders

- SAN transparent or black body
- On request it is possible to have one or two additional holes (1/2" or 3/4")



model	electrodes connection	flow sensor	fitting	temperature (°C)	pressure (bar)
■ NPED-E	Eolum	-	6x8	50	5
■ NPED-E2	Etorb2	-	6x8	40	5
■ NPED-E2-EV	Etorb2+valv. mot. 3/4"	-	6x8	40	5
■ NPED-IND	Ecdindpt	-	6x8	40	5
■ NPED-IND PP	Ecdindpt	-	6x8	60	5
■ NPED-INDS	Ecdindspt	-	6x8	40	5
■ NPED1	2 (ø 12-pg13,5)	-	6x8	40	5
■ NPED2	2 (epoxy ø 12)	-	6x8	40	5
■ NPED5	2 (epoxy ø 12) 1 (1/2" thread)	-	6x8	40	5
■ NPED4	2 (epoxy ø 12)	N.o.	6x8	40	5
■ NPED4-1/2	2 (epoxy ø 12) 1 (1/2")	N.o.	6x8	40	5
■ NPED4/2F	2 (epoxy ø 12)	2 wires for N.C. contact instrument	6x8	40	5

ACCESSORIES


description

Cleaning Kit for NPED-E2-EV

PEF

Off-line probe holders

- Off-line probe holders for closed amperometric cells
- With flow level control, proximity switch and capacity stabilizer (0,4 / 3 bar)
- PMMA body and PVDF fittings
- Off-line probe holders for membrane probes (SCL3, SCL2, SCL8, SCL9, SCL10, SCL11, SBR, SCT) have got an anti-vacuum device

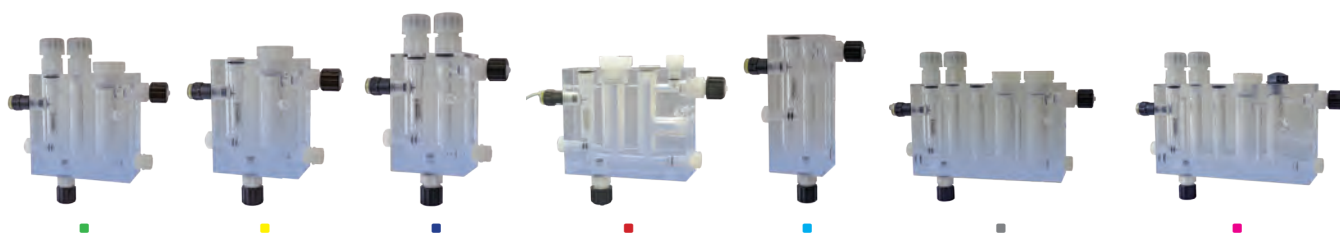

model	electrodes connection	fitting	temperature (°C)	pressure (bar)	hose
■ PEF1R	1 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF1ER	1 x scl; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF1ER/K	1 x scl; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF1R/K	1 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF2	2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF2/K	2 x ø 12; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF3	2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF5R	1 x scl; 2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF5R/K	1 x scl; 2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF22R	2 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF23R	1 x scl; 2 x ø 12; 1 x temp.; 1 x cd (3/4")	6x8 PVDF	50	5	4 m pe
■ PEF24R	1 x efl	6x8 PVDF	50	5	4 m pe
■ PEF26R	1 x scl; 1 x efl	6x8 PVDF	50	5	4 m pe
■ PEF27R	1 x scl; 1 x cd (3/4")	6x8 PVDF	50	5	4 m pe

PROXIMITY SENSOR

description

Inductive proximity sensor SEPR

LED STRIP

description

LED strip